


# Apricum 400



**Apricum 400** HID floodlight luminaire for MH/HPS lamps is used for indoor and outdoor applications. Housing of high pressure aluminium die-cast coated with epoxy powder, steel mounting bracket coated with epoxy powder and thermal resistant tempered glass.

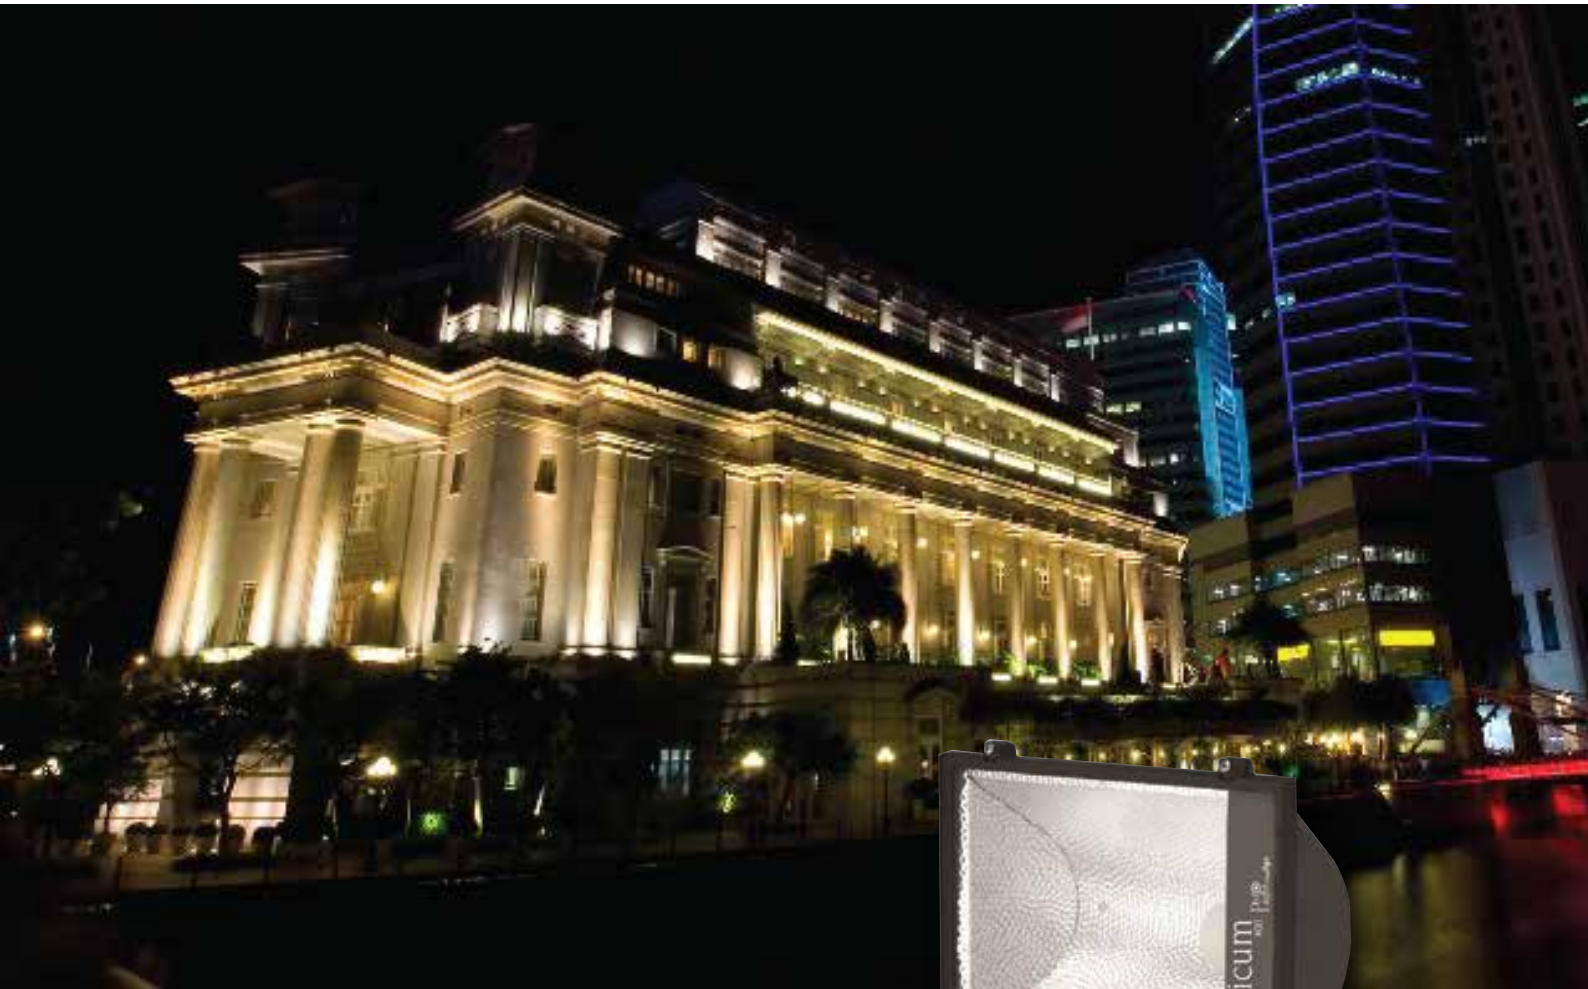

## Product Description:

Apricum 400 HID Floodlight, with high purity anodized hammered aluminium reflector, optical cover: thermal resistant tempered glass, light characteristic: symmetric, luminaire housing of high pressure aluminium die-cast coated with epoxy powder, steel mounting bracket coated with epoxy powder. Control gear: electromagnetic (built in), for MH/HPS, mains connection: 220-240VAC, 50Hz, Length: 435 mm, width: 420 mm, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, ETS, ENEC, AENOR.

Packaging unit: 1 Piece



HPS, E40






MH, E40




Model	Wattage (w)	Lamp Type	Lamp holder	Dimensions(mm)			EAN
				L	W	H	
DUAP 400	250/400	HPS/MH	E40	435	420	147	6291124008223
DUAPH 400	250/400	MH	E40	435	420	147	6291114006222

## Dimensions



## Photometric graph



## Applications

1. Parking area
2. Hoardings
3. Factories
4. Harbours
5. Sport stadiums