



Nexus Metal Wiring Accessories

Premium metal accessories, in a range of superior quality finishes that will complement any interior decor

Nexus Metal




No visible plastic around switches



Lightly lacquered surface to reduce fingerprint marks



Modern slim profile

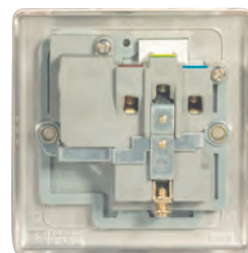

Angled in-line colour coded captive terminals

Switches & Sockets	73
Round Pin & Export	74
FCUs	74
45 Amp Switches	75
Coax & Satellite	75
Telephone & Data	76
Dimmers	76
Shaver Sockets	77
Blank Plates	77
Key Card Switch	78
Accessories	78



Nexus Metal is available in three stocked finishes



Brushed Steel



Polished Chrome



Black Nickel

Extended range of six additional colour finished now available in sixteen products



Matt Black



Antique Brass



Cream



Pearl Nickel



Brushed Iridium



Gloss White

For specification projects, BG can offer a wider selection of finishes. Or, if the project demands, any finish can be created to suit the requirement. Examples include:

Nexus Metal

Cat No.	Description	Inner Carton	Outer Carton
10 Amp 10AX Switches			

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS12	NPC12	NBN12	NAB12	NBI12	NCR12	NPW12	NMB12	NPR12	10AX plate switch 1 gang, 2 way	5	50
NBS13	NPC13	NBN13	NAB13	NBI13	NCR13	NPW13	NMB13	NPR13	10AX plate switch intermediate	5	50
NBS14	NPC14	NBN14	-	-	-	-	-	-	10AX plate switch bell push **	5	50
NBS15	NPC15	NBN15	-	-	-	-	-	-	10AX plate switch 3 pole fan isolator	5	50
NBS42	NPC42	NBN42	NAB42	NBI42	NCR42	NPW42	NMB42	NPR42	10AX plate switch 2 gang, 2 way	5	50
NBS43	NPC43	NBN43	NAB43	NBI43	NCR43	NPW43	NMB43	NPR43	10AX plate switch 3 gang, 2 way	5	50
NBS44	NPC44	NBN44	-	-	-	-	-	-	10AX plate switch 4 gang, 2 way	5	50

- Plate-switches manufactured to BS EN 60669-1, fan isolator to IEC 60669-2-4.
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Captive terminal screws

- Minimum mounting box depth:
1 & 2 Gang 16mm
3 & 4 Gang 25mm

**Bell push switch made to order, contact Customer Services for more details



13 Amp Double Pole Socket Outlets


Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS21W	NPC21W	-	-	-	-	-	-	-	1 gang 13A switched socket	5	50
NBS21B	-	NBN21B	NAB21B	NBI21B	NCR21B	NPW21B	NMB21B	NPR21B	1 gang 13A switched socket	5	50
NBS21G	-	-	-	-	-	-	-	-			
NBS22W	NPC22W	-	-	-	NCR22W	NPW22W	NMB22W	NPR22W	2 gang 13A switched socket	5	50
NBS22B	-	NBN22B	NAB22B	NBI22B	-	-	-	-	2 gang 13A switched socket	5	50
NBS22G	-	-	-	-	-	-	-	-			



- Manufactured to BS 1363 part 2
- Brushed Steel insert colours = White (W), Grey (G) and Black (B)
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm
- Twin earth fitted as standard to allow a double Earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008

13A Switched Socket with USB Charger

For Polished Socket With USB Charger											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS22UW	NPC22UW	-	-	-	NCR22UW	NPW22UW	-	NPR22UW	2g Socket + 2 x USB (2.1A), White Insert	5	50
NBS22UG	-	-	-	-	-	-	-	-	2g Socket + 2 x USB (2.1A), Grey Insert	5	50
NBS22UB	-	NBN22UB	NAB22UB	NBI22UB	-	-	NMB22UB	-	2g Socket + 2 x USB (2.1A), Black Insert	5	50

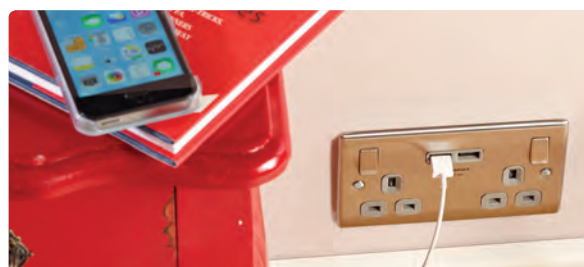


- Twin earth fitted as standard to allow a double Earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS 5733 and BS EN 50950
- 2 gang switched socket with outboard rockers
- 2 x Type A USB sockets - 2.1A total output, 5V

- Ideal for charging iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm - ideal for retrofit.

Nexus Metal

Cat No.	Description	Inner Carton	Outer Carton
Combination Plate			
Brushed Steel	Polished Chrome		
NBS222GEM8	NPC222WEM8	2 X 2g Socket + 2 x 4 Module Aperture	5 50

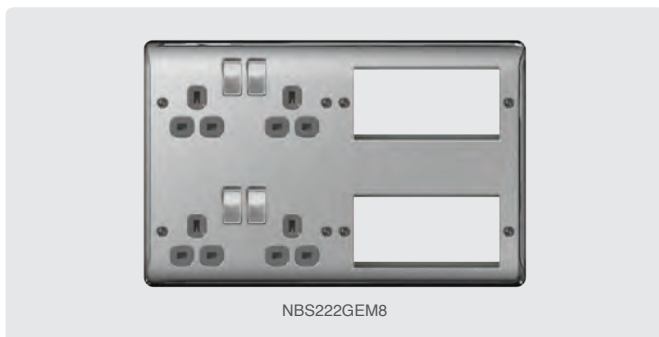

- Twin earth fitted as standard
- Manufactured to BS 1363 Part 2
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Mounting box depth 47mm (HGS07/04)
- Modules of mains and extra low voltage rating must not be fitted to the same front plate aperture Ref. BS 7671:2008
- * See our Euro module range, for further Telecom, Data and Co-axial Options

Cat No.	Description	Inner Carton	Outer Carton
Round Pin and Export Socket Outlets			
Brushed Steel	Polished Chrome	Black Nickel	
NBS28W	NPC28W	NBN28B	2A unswitched socket round pin
NBS28G	-	-	
NBS29W	NPC29W	NBN29B	5A unswitched socket round pin
NBS29G	-	-	
NBS99W	NPC99W	NBN99B	15A 1 gang switched socket
NBS99G	-	-	
NBS98W	NPC98W	NBN98B	16A 2 gang unswitched Euro socket
NBS98G	-	-	



- 2/5/15A Manufactured to BS 546
- Brushed Steel insert colours = White (W) & Grey (G)
- Minimum mounting box depth 25mm


13 Amp Fused Connection Units											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS50	NPC50	NBN50	NAB50	NBI50	NCR50	NPW50	NMB50	NPR50	13A switched FCU	5	50
NBS52	NPC52	NBN52	-	-	-	-	-	-	13A switched FCU with power indicator	5	50
NBS53	NPC53	NBN53	-	-	-	-	-	-	13A switched FCU with power indicator and cable outlet	5	50
NBS54	NPC54	NBN54	-	-	-	-	-	-	13A unswitched FCU	5	50
NBS55	NPC55	NBN55	-	-	-	-	-	-	13A unswitched FCU with cable outlet	5	50

- Manufactured to BS 1363 part 4
- Minimum mounting box depth 35mm
- Angled colour coded terminals with captive screws
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²



Nexus Metal

Cat No.									Description	Inner Carton	Outer Carton
20 Amp Double Pole Switches											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS31	NPC31	NBN31	NAB31	NBI31	NCR31	NPW31	NMB31	NPR31	20A DP switch with power indicator	5	50

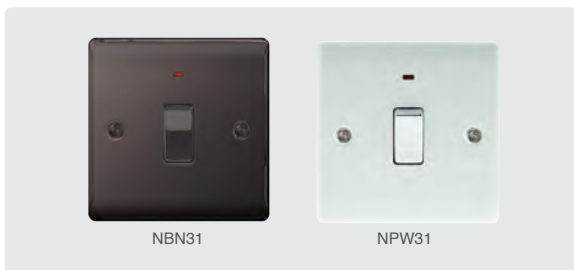

- Manufactured to BS EN 60669-1
- Colour coded terminals with captive angled screws
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Minimum mounting box depth 25mm

45 Amp Double Pole Switches										
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel		
NBS70W	NPC70W	NBN70B	NAB70B	NBI70B	NCR70B	NPW70B	NMB70B	NPR70B	45A DP with 13A socket & power indicators	5 50
NBS70B	-	-	-	-	-	-	-	-		
NBS70G	-	-	-	-	-	-	-	-		
NBS72	NPC72	NBN72	-	-	-	-	-	-	45A DP with power indicator, double plate	5 50
NBS74	NPC74	NBN74	NAB74	NBI74	NCR74	NPW74	NMB74	NPR74	45A DP with power indicator, single plate	5 50



- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- Brushed Steel insert colours = White (W), Grey (G) & Black (B)
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- E terminal capacity 3 x 4.0mm², 2 x 6.0mm² & 1 x 16.0mm²
- Minimum mounting box depth 47mm

Co-Axial and Satellite Sockets										
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel		
NBS60	NPC60	NBN60	NAB60	NBI60	NCR60	NPW60	NMB60	NPR60	Co-axial socket, 1 gang	5 50
NBS61 ⁺	NPC61 ⁺	NBN61 ⁺	-	-	-	-	-	-	Co-axial socket, 2 gang	EM -
NBS62 ⁺	NPC62 ⁺	NBN62 ⁺	-	-	-	-	-	-	Isolated co-axial socket, 1 gang	EM -
NBS63 ⁺	NPC63 ⁺	NBN63 ⁺	-	-	-	-	-	-	Isolated co-axial socket, 2 gang	EM -
NBS64 ⁺	NPC64 ⁺	NBN64 ⁺	-	-	-	-	-	-	Satellite socket, 1 gang	EM -
NBS65 ⁺	NPC65 ⁺	NBN65 ⁺	-	-	-	-	-	-	Satellite and co-axial socket, 2 gang	EM -
NBS66 ⁺	NPC66 ⁺	NBN66 ⁺	-	-	-	-	-	-	Diplex TV/FM socket, 2 gang	EM -
NBS67 ⁺	NPC67 ⁺	NBN67 ⁺	-	-	-	-	-	-	Triplex TV/FM/Sat - Screened	EM -
NBS68 ⁺	NPC68 ⁺	NBN68 ⁺	-	-	-	-	-	-	Triplex TV/FM/Sat + Return & 1 gang Tel - Screened	EM -
NBS69 ⁺	NPC69 ⁺	NBN69 ⁺	-	-	-	-	-	-	Quadplex TV/FM/Sat (x2) + Return & 1 gang Tel - Screened	EM -

- Manufactured to BS 5733
- EM = Euro Module configuration
- Supplied as kit of Euro Module components
- Co-axial and satellite minimum mounting box depth 25mm

- Insert colours -
Polished Chrome = White, Brushed Steel = Grey
Black Nickel = Black, Polished Brass = Black
- Triplex minimum mounting box depth 35mm

* See our Euro module range, for further Telecom, Data and Co-axial Options



Nexus Metal

Cat No.

Description

Inner
Carton

Outer
Carton

Telephone and Data Outlets

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBSBTM1	NPCBTM1	NBNBTM1	NABBTM1	NBIBTM1	NCRBTM1	NPWBTM1	NMBBTM1	NPRBTM1	Telephone master, 1 gang	5	50
NBSBTM2*	NPCBTM2*	NBNBTM2*	-	-	-	-	-	-	Telephone master, 2 gang	EM	-
NBSBTS1	NPCBTS1	NBNBTS1	NABBTS1	NBIBTS1	NCRBTS1	NPWBTS1	NMBBTS1	NPRBTS1	Telephone slave, 1 gang	5	50
NBSBTS2*	NPCBTS2*	NBNBTS2*	-	-	-	-	-	-	Telephone slave, 2 gang	EM	-
NBSRJ111	NPCRJ111	NBNRJ111	-	-	-	-	-	-	RJ11 socket, 1 gang	5	50
NBSRJ112*	NPCRJ112*	NBNRJ112*	-	-	-	-	-	-	RJ11 socket, 2 gang	EM	-
NBSRJ451	NPCRJ451	NBNRJ451	-	-	-	-	-	-	RJ45 data outlet socket, 1 gang	5	50
NBSRJ452*	NPCRJ452*	NBNRJ452*	-	-	-	-	-	-	RJ45 data outlet socket, 2 gang	EM	-

- Manufactured to BS 6312-2 where applicable
- EM = Euro Module configuration

- * Supplied as kit of Euro Module components
- Minimum mounting box depth 35mm



NBSBTM1



NPCBTS1



NBNRJ112



NBSRJ452

Fan Controller, 4 speed

Brushed Steel	Polished Chrome	Black Nickel			
NBS87	NPC87	NBN87	1 gang, 1 way rotary, 100W	5	50



NBS87



NPC87

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 35mm

Dimmer Switches - Push On/Off

Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS81P	NPC81P	NBN81P	NAB81P	NBIB81P	NCR81P	NPW81P	NMB81P	NPR81P	1 gang, 2 way, 400W	5	50
NBS82P	NPC82P	NBN82P	NAB82P	NBIB82P	NCR82P	NPW82P	NMB82P	NPR82P	2 gang, 2 way, 400W	5	50
NBS83P	NPC83P	NBN83P	-	-	-	-	-	-	3 gang, 2 way, 400W	5	50
NBS84P	NPC84P	NBN84P	-	-	-	-	-	-	4 gang, 2 way, 400W	5	50
NBS85P	NPC85P	NBN85P	-	-	-	-	-	-	1 gang, 1,000W - square plate (export only)	5	50

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 10mm spacer available to provide additional wiring space (817 - Sq, 818 - Rect)
- Suitable for Compact fluorescent lamps (CFL) and LED Dimming

- There can be issues with dimming CFL and LED lamps at a low lighting level. The Nexus dimmer products have an adjustable minimum level features which can be used to adjust the lighting output at a low level, to stabilize the load.



NBS81P



NPC82P



NBN83P



NBS84P

Nexus Metal

Cat No.									Description	Inner Carton	Outer Carton
Shaver Socket											
Brushed Steel	Polished Chrome	Black Nickel	Antique Brass	Brushed Iridium	Cream	Gloss White	Matt Black	Pearl Nickel			
NBS20G	NPC20W	NBN20B	-	-	-	-	-	-	Shaver socket 115/230V dual voltage	5	50
NBS20W	-	-	-	-	-	-	-	-		5	50
NBS20B	-	-	NAB20B	NBI20B	NCR20B	NPW20B	NMB20B	NPR20B		5	50

- Manufactured to BS EN 61558-1 and BS EN 61558-2-5
- Mounting box depth 47mm

- Terminal capacity 3 x 2.5mm² & 2 x 40mm²

INSERT COLOURS: Polished Chrome = White, Brushed Steel = Grey (G), White (W) & Black (B), Black Nickel = Black, Polished Brass = Black



Blank Plates											
Brushed Steel	Polished Chrome	Black Nickel									
NBS94	NPC94	NBN94	1 gang							5	50
NBS95	NPC95	NBN95	2 gang							5	50

- Manufactured to BS EN 60670



Euro Module Front Plates											
Brushed Steel	Polished Chrome	Black Nickel									
NBSEMS1	NPCEMS1	NBNEMS1	Single euro module, single plate							10	100
NBSEMS2	NPCEMS2	NBNEMS2	Twin euro module, single plate							10	100
NBSEMR4	NPCEMR3	NBNEMR4	Quad euro module, double plate							5	50

- Manufactured with Earth Terminal

- Fitted with Earth terminal



Nexus Metal

Cat No.			Description	Inner Carton	Outer Carton
16 Amp Hotel Key Card Switch					
Brushed Steel	Polished Chrome	Black Nickel			
NBSKYCSG ⁺	NPCKYCSW ⁺	NBNKYCSB ⁺	16 amp. hotel key card switch	EM	-



- 50 x 50mm Euro module
- Load Rating - 1800W for resistive 800W for inductive
- 30 second power-off delay
- Locator LED
- Mounting box depth 47mm Colour coded terminals with backed-out and captive screws
- Designed and manufactured to BS EN 60669-2-1

* Supplied as kit of Euro Module components

Cat No.	Description	Inner Carton	Outer Carton
13 Amp Double Pole Key Controlled Socket Outlet			
NBSKYSWG*	13 amp, double pole key controlled socket outlet	EM	-




- Manufactured to BS 1363-2, BS EN 60669-1
- Mounting box depth 47mm
- Terminal capacity 3 x 2.5mm², 2 x 4mm², 1 x 6mm²
- Lockable socket, supplied with two keys
- DP switch

* Supplied as kit of Euro Module components


Spare Accessories

NFS19/10	M3.5 x 19mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS28/10	M3.5 x 28mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS38/10	M3.5 x 38mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS19/10BN	M3.5 x 19mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS28/10BN	M3.5 x 28mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS38/10BN	M3.5 x 38mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS19/10BR	M3.5 x 19mm screws, pack of 10 (For Brass)	100pks	1000
NFS28/10BR	M3.5 x 28mm screws, pack of 10 (For Brass)	100pks	1000
NFS38/10BR	M3.5 x 38mm screws, pack of 10 (For Brass)	100pks	1000

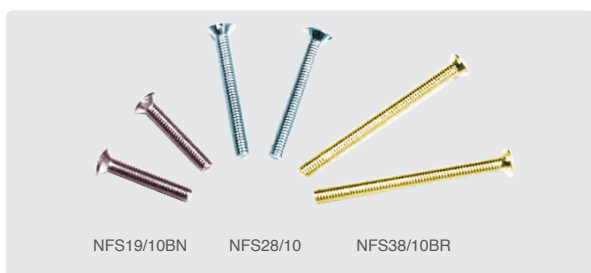

Euro Module - Range Extension

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.

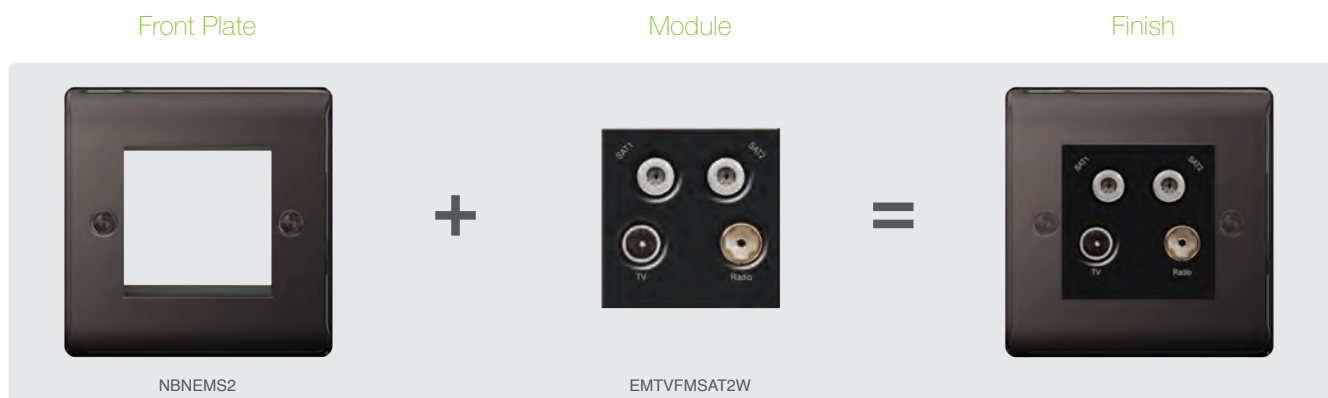


For full information on Euro Modules, please see pages 49-56

Grid - Range Extension

A customisable selection of power grid modules that provide a seamless appearance with the associated wiring accessories.

- Firstly, screw the grid frame to the mounting box and wire the modules
- Then slot the module on to the frame and click into place
- Finally, fit the finished plate

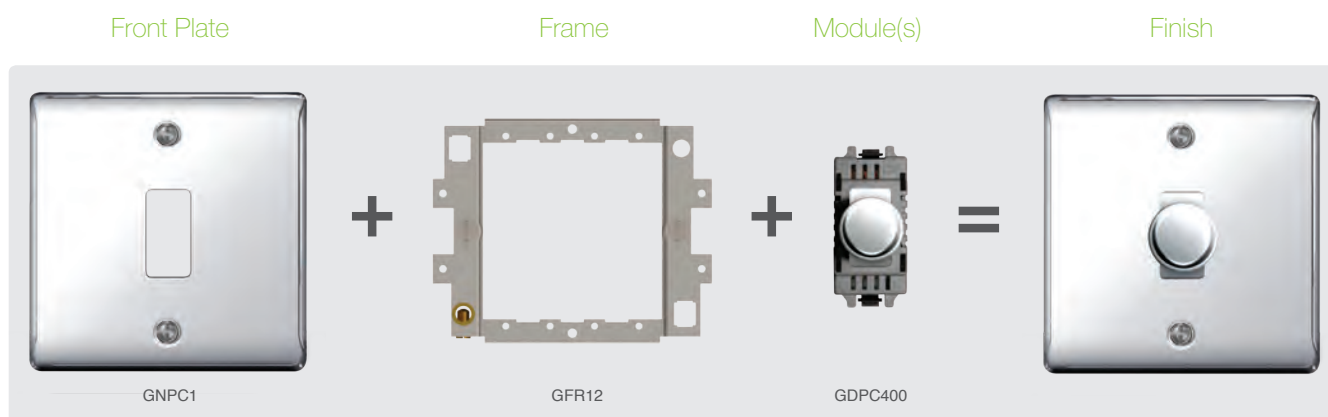

For full information on Nexus Grid, please see pages 41-48

Nexus Metal



6 Additional finishes available in a limited range of products*

- Finishes: Antique Brass, Brushed Iridium, Cream (chrome rockers), Gloss White (chrome rockers), Matt Black (chrome rockers) & Pearl Nickel
- Modern slim profile
- No visible plastic around switches
- Integral gasket for moisture protection
- Angled in-line colour coded captive terminals

*Additional finish available in sixteen popular lines only



Antique Brass



Brushed Iridium



Cream



Gloss White



Matt Black



Pearl Nickel

Standard Finishes



Brushed Steel



Polished Chrome



Black Nickel